



Motorola Droid Turbo 2 Front-Facing Camera Replacement

This guide shows how to replace your Droid's front-facing camera.

Written By: Natalie W



INTRODUCTION

Follow these steps to replace your broken Droid Turbo 2 front-facing camera.



TOOLS:

- [T6 Torx Screwdriver](#) (1)
 - [T3 Drillbit](#) (1)
 - [T4 Torx Bit](#) (1)
 - [SIM Card Eject Tool](#) (1)
 - [Heavy-Duty Spudger](#) (1)
 - [iFixit Opening Tools](#) (1)
 - [Precision Tweezers Set](#) (1)
-

Step 1 — Back Cover




- ❗ Power off your phone before you begin working.
- Pop out the SIM card with pointed tweezers or a SIM card eject tool by gently pushing inwards until the tray pops out.

Step 2



- Use the spudger to remove the back cover by gently guiding the spudger around the perimeter of the cover.

Step 3

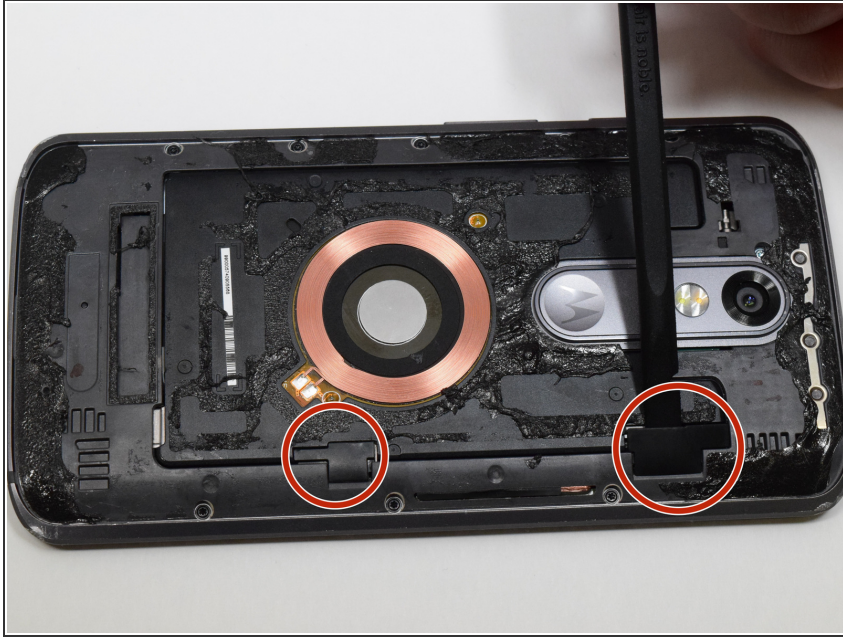


- Use the spudger to gently remove the two plastic covers.

Step 4



- Under the two plastic covers will be two connectors.
- Use a plastic opening tool to pry up the two connectors. These do not completely come off.


Step 5

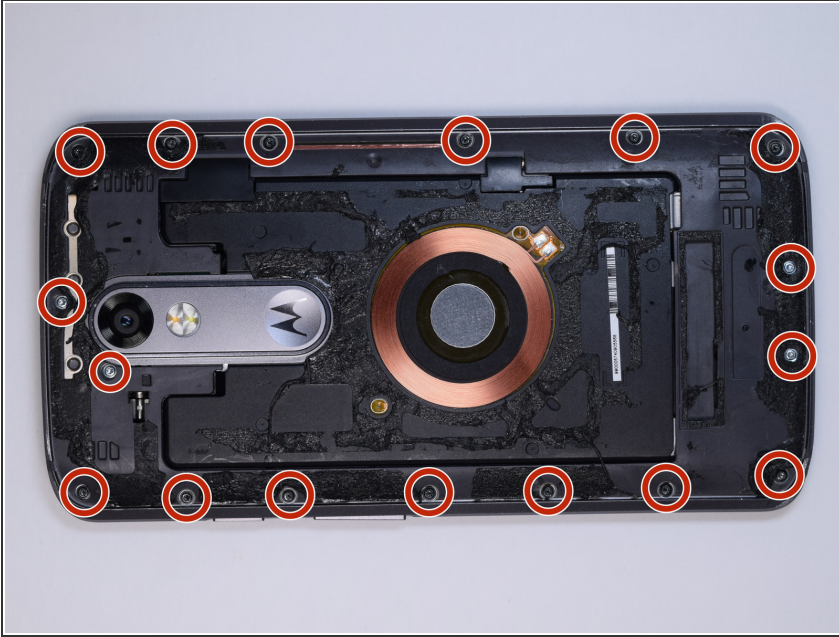

- Remove the 17 screws from the board using a T3 bit on your screw driver. Or, use a T4 bit if the screw is slightly stripped.

i The four silver screws on the top and bottom are 4.0mm Phillips #00, and the 13 black screws around the sides are 3.0mm Phillips #00.


Step 6

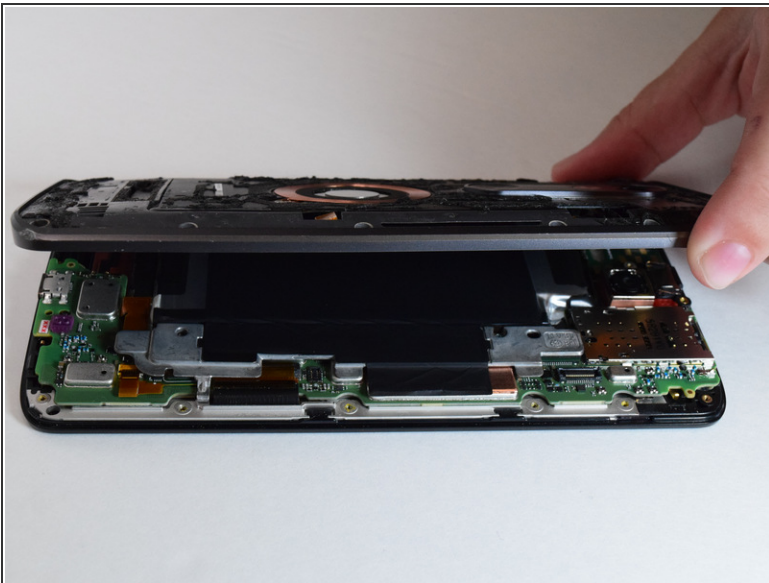

- Remove the back cover from the phone.

i The volume and power buttons are likely to fall out of the device when removing the back cover. This is normal.

Step 7 — Front-Facing Camera

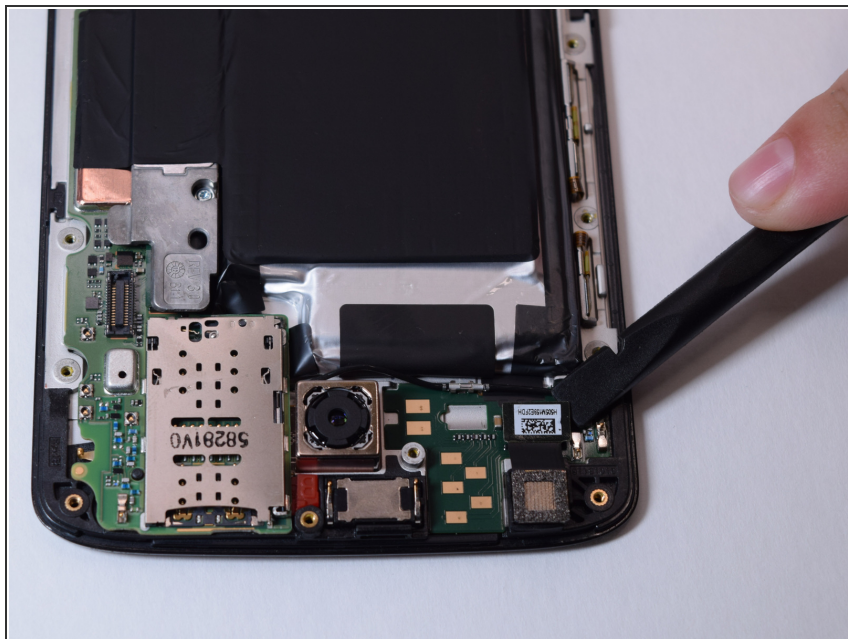

- Use the spudger to delicately pry up the front-facing camera and remove it from the phone.

To reassemble your device, follow these instructions in reverse order.

This document was last generated on 2017-07-25 10:14:55 AM.